


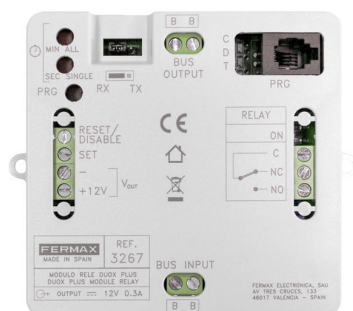

Productcode

F03267

DUOX PLUS RELAY

Referentie

3267

EAN

8424299032672

Omschrijving.

Omschrijving

The DUOX PLUS Relay allows for dry contacts in DUOX PLUS system, with various operating and activation modes to be configured:

- Relay activation using commands generated from the residential terminals, entry panels or guard units.
- External activation using buttons, additional external switches, etc. The DUOX PLUS relay can be installed in any part of the DUOX PLUS bus. You can install one or several relays: by apartment, block or installation.

System: DUOX PLUS (2 wires digital).

Aanvullende technische details

- Power supply: 18 - 24 Vdc (non-polarised, via the BUS INPUT or BUS OUTPUT).
- Consumption:
 - * In standby: 1,24 W.
 - *Maximum: 4,4 W.
- Operating temperature: [0, 40°C].
- IP Address: 20.
- (+12V): Auxiliary voltage output 12Vdc (300 mA max).
- Dry contact relay:
 - C: Common.
 - NC: Normally Closed.
 - NO: Normally Open.
 - * Maximum current 3A.
 - * Maximum voltage 250 VAC or 30 VDC.

Details.

Gewicht product verpakt (kg)	Afmetingen verpakking (cm)	VP-technologie
0.3703	7,5x23x17,8	DUOX

Handleidingen

- [97821c_Rele_DUOX_PLUS_ref_3267_V01_24.pdf](#)
- [97822Ac Man Avanzado Rele DUOX PLUS ref 3267 V11_20.pdf](#)
- [97822Ec Man Avanzado Rele DUOX PLUS ref 3267 V11_20.pdf](#)
- [97822Fc Man Avanzado Rele DUOX PLUS ref 3267 V11_20.pdf](#)
- [97822Ic Man Avanzado Rele DUOX PLUS ref 3267 V11_20.pdf](#)
- [97822Pc Man Avanzado Rele DUOX PLUS ref 3267 V11_20.pdf](#)