

POWER SUPPLY

Ref. 4812

DESCRIPTION

Used to power the different equipment in a Fermax installation.

Constructed in self-extinguishing VO material.

Includes a set of covers to protect the connection terminals.

DIN-6 rail format for easy installation inside an electrical equipment box, or can can be screwed directly onto the wall.

TECHNICAL SPECIFICATIONS

DIN 6 dimensions	105x 90 x60 mm
Input tension	100-240 Vac
Output tension	18 Vdc
Output current	1,5A
Input protection	PTC and 2,3A fuse
Output protection	Electronic limitation for overload and short circuit
Input frequency	50-60 Hz


- With two function indicator LEDs:
- **ON LED** lit: indicates that the power supply is working.
 - **OVERLOAD LED** lit: indicates maximum current exceeded (it will be necessary to reduce the installation load or add additional power supply/supplies).
 - **ON LED+OVERLOAD** blinking: indicates short circuit.

DIMENSIONS

DIN 6

Size of product when packed: 11x9,5x6,5 cm

Weight: 0,2833 Kg

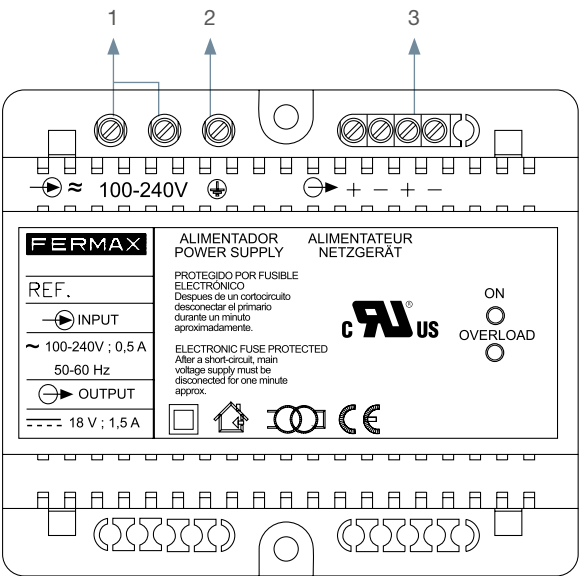

LEGEND

1. Tension between 100-240 Vac.
2. Earth connection
3. Output tension 18 Vdc.