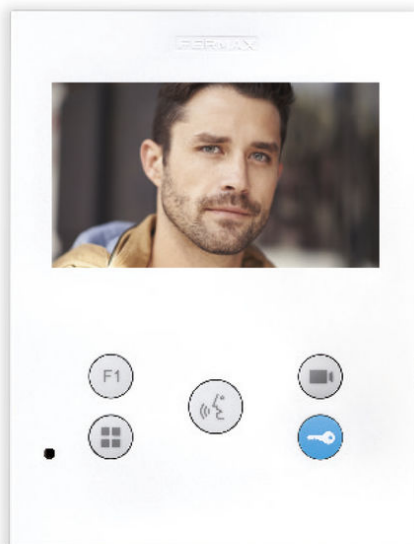


Productcode

F09458

DUOX PLUS VEO-XS DDA 4.3"
MONITOR

Referentie

9458

EAN

8424299094588

Omschrijving.

Omschrijving

VEO-XS handsfree monitor. Het wordt gekenmerkt door zijn kleine formaat en dikte, extra vlak. Dankzij het OSD-menu en de lay-out van de knoppen is de interactie met de gebruiker eenvoudig en intuïtief. Gemaakt van slagvast ABS-kunststof. Getextureerde afwerking voor eenvoudige reiniging en UV-bescherming om het beter bestand te maken tegen zonlicht.

De VEO-XS is voorzien van een 4,3 "(16: 9) breedbeeldscherm in kleur. Het uitgebalanceerde ontwerp met strakke lijnen is onderscheidend, modern en minimalistisch. VEO-XS gaat op in de omgeving. Wanneer er een oproep binnenkomt, verschijnt het beeld automatisch. de gespreksknop wordt ingedrukt, het gesprek met de bezoeker begint. Het beeld verdwijnt automatisch na 90 seconden of wanneer de knop opnieuw wordt ingedrukt Om de deur te openen, drukt u op de sleutelknop.

ACCESSOIRES:

CONNECTOR

9447 CONNECTOR DUOX PLUS-MONITOR

Voor montage van de monitor aan de muur.

VERVANGING

3388 UNIVERSEEL KADER 120X240

Extra plat formaat, gemaakt van slagvast ABS-plastic, heeft een fijne structuurafwerking. Bij vervanging kan het de opening overbruggen die is achtergelaten door eerdere apparatuur.

Afmetingen 120 x 240 x 10 mm.

3389 UNIVERSEEL KADER GROOT 120x240

Afmetingen: 120 x 240 x 10 mm

Aanvullende technische details

GENERAL CHARACTERISTICS

Technology: DUOX PLUS (non-polarised 2 wire full digital system)

Audio/Video system: Audio/Video Color

Set-up (Installation): Surface mounted (order connector ref. 9447 separately)

Desktop support: Yes (ref. 9420)

Hands-free communication: Yes

Press-to-talk communication configurable: Yes

Induction loop : Yes

Screen dimensions: 4,3" (Panoramic 16:9)

Screen resolution (H x V): 480 x 272

Color of the product: Matt white

Number of pushbuttons: 5

Kind of pushbuttons: Mechanical (silicone)

Number of leds for lighted indications: 3 (red, blue, green with different states)

PROGRAMMING OF THE TERMINAL ADDRESS

From the terminal: From the OSD menu

From the outdoor panel or guard unit: Yes

From the outdoor panel throughout the apartment door bell: Yes

FEATURES

Automatic picture capture when the visitor calls (PHOTOCALLER): Yes (1 photo/call, until 150 photos, 368 x 288 pixels). This feature can be enabled by the user. Disabled by default.

Guard unit call: Yes (by means of the door release button)

Auto-on: Yes (with 3 outdoor panels/cameras)

OSD menu: Yes

Additional function F1: Yes (Button F1 sends a negative and/or command)

Additional function F2: Yes (it only sends command, no negative)

Apartment door bell differentiated from the outdoor panel: Yes

Connection for additional devices (call extension, light/buzzer activator, etc.): Yes (ref. 2040, ref. 2438, ref. 3267)
Additional terminals on the same address: Yes, max. 2 additional terminals (additional power supply can be required)
Doormatic (automatic door release for offices, etc.): Yes (configurable until 12h). Green Led ON.

ADJUSTMENTS

Date and time: Yes
Ring tones selection: Yes (5). Configurable for Block Panel 0, Block Panel 1, General Entrance Panel 0 and Concierge unit.
Call volume control: Yes (10 levels by OSD menu)
Do-not-disturb mode: Yes (by OSD menu) + Red led indication
Audio volume control: Yes (10 levels by OSD menu)
Brightness, color and contrast control: Yes (by OSD menu)

TECHNICAL FEATURES

Product dimensions (width x height x depth) mm: 125 x 165 x 21
Time to answer or open the door since the call is done: 30 s.
Conversation time: 90 s.
Conversation privacy: Yes
Voltage: 18-24 Vdc
Maximum consumption: 6.5 W (14,4W if the induction loop is on)
Standby consumption: 0.8 W
Working temperature (°C, °F); Humidity: [-5°C, +40°C][23°F, 104°F]; [0%, 90%]
Line adaptor included in the terminal: Yes (A, C, default position OFF)
Connections: Bin, Bin, Bout, Bout, -, A+, F1, T

Details.

Productafmetingen (hoogte x breedte x diepte) mm	Gewicht product verpakt (kg)	Afmetingen verpakking (cm)	VP-technologie
165 x 125 x 21	0.284	17x12,8x4	DUOX

Handleidingen

- 970142Ad Guia rap Usuario Monitor VEO XS V05_23.pdf
- 970142Ag Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Ed Guia rap Usuario Monitor VEO XS V05_23.pdf
- 970142Eg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Fd Guia rap Usuario Monitor VEO XS V05_23.pdf
- 970142Fg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Id Guia rap Usuario Monitor VEO XS V05_23.pdf

- 970142lg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Pd Guia rap Usuario Monitor VEO XS V05_23.pdf
- 970142Pg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970157Eld_Monitor_VEO_XS_duox_V10_23.pdf
- 970157FAd_Monitor_VEO_XS_duox_V10_23.pdf
- 970157Pd_Monitor_VEO_XS_duox_V10_23.pdf
- 970158c_Guia_rap_monitor_VEO_XS_duox_NEW_V10_23.pdf

Conformiteitsverklaring

- DOCF09458ES.pdf

Accessoires



F09447

DUOX PLUS CONNECTOR



F03388

MARCO UNIVERSAL



F03389

MARCO UNIVERSAL LARGE



F02040

PROLONGADOR LLAMADA TELEFONO



F09420

SOPORTE SOBREMESA MONITOR VEO-
XS/VEO-XL

Video formativo

- <https://youtube.com/playlist?list=PLf1YNFmssC37H-1CN64lo6ND28rmVsQit>