


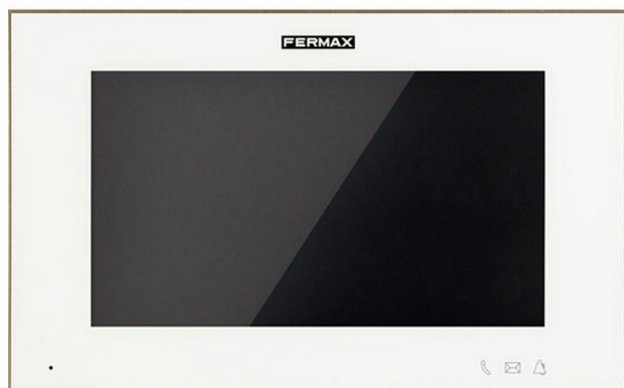

Product Code

F14721

WIT 7" MONITOR POE WHITE MEET

Reference

14721

EAN

8424299147215

Description.

Description

WIT is a capacitive touch screen monitor available in 7" and 10" versions. WIT graphical interface provides an intuitive user experience since it is design focused on a residential intercom use.

FEATURES

- Capacitive Touch Screen (7" / 10")
- Hands Free Audio Communication
- High definition colour TFT
- Different ringtones depending on call source
- 2 Different colour options (white and black)
- Remote firmware upgrade
- Android based
- Available in 9 languages (English, Spanish, German, Polish, Russian, Hebrew, Turkish, Chinese, Portuguese)
- Remotely reset and factory settings
- Door bell connection with IP camera visualization
- IP CCTV visualization (up to 8)
- Aux IP CCTV camera visualization and aux relay operation during call (up to 4)
- Relay activation (up to 8 using relay module)
- Home Automation Ready through Apps (in 7" and 10")
- Automatic and Manual Picture Capture
- Integrated 7 zones alarm + tamper

- Lift control with feedback

Technical Details

System:

- CPU: Quad-core
- FLASH: 4GB
- SDRAM: 1024 MB

Screen:

- 7 and 10 inch format
- Capacitive touch screen
- Format: 16:9
- Resolution: 1024x600
- Brightness: 7" 200cd/m2; 10" 220cd/m2
- Contrast: 7" 400/1; 10" 450/1
- View Angle: 7" 160° Horizontal, 130° vertical; 10" 120° Horizontal, 110° Vertical

Audio/Video Features:

- G.711 audio codec
- H.264 video codec
- RTSP compatible for CCTV IP cameras
- Audio level adjustable on conversation and mute
- Hands-free operation
- Private communication
- Selectable call melodies based on call origin

Power Consumption:

- On standby: 200 mA (7") / 210 mA (10")
- Conversation: 500 mA (7") / 600 mA (10")

Working voltage:

- PoE
- 12 Vdc

Connectivity:

- 1 x Ethernet RJ-45 (WIT 7")
- 2 x Ethernet RJ-45 (WIT 10") for building and apartment network isolation.
- Doorbell input (1 alarm zone input)
- Panic button input (1 alarm zone input)

- Built in web server for configuration and remote management

Working Environment:

- Temperature: -10 oC .. +55 oC
- Humidity: 20 – 85% (Non-condensing)
- IP: 30

Details.

Product measurements (height x width x depth) mm	Weight (kg)	Packaging measurements (height x width x depth) cm	Video Door Entry system
130 X 210 X 20	0.65	6,8x31x21,5	Technologie MEET

Manuals

- 970203Eb_Manual_instalador_Monitor_MIO_WIT_V11_20.pdf
- 970295_Guia_Rap_Inst_Monitor_WIT_V07_23.pdf

Declaration of conformity

- DOCF14701EN.pdf

Accessories



F95411
NEO/WIT MONITOR
CONNECTOR MEET