


REF.953303 1/W VIDEO MILO PANEL BLACK POE

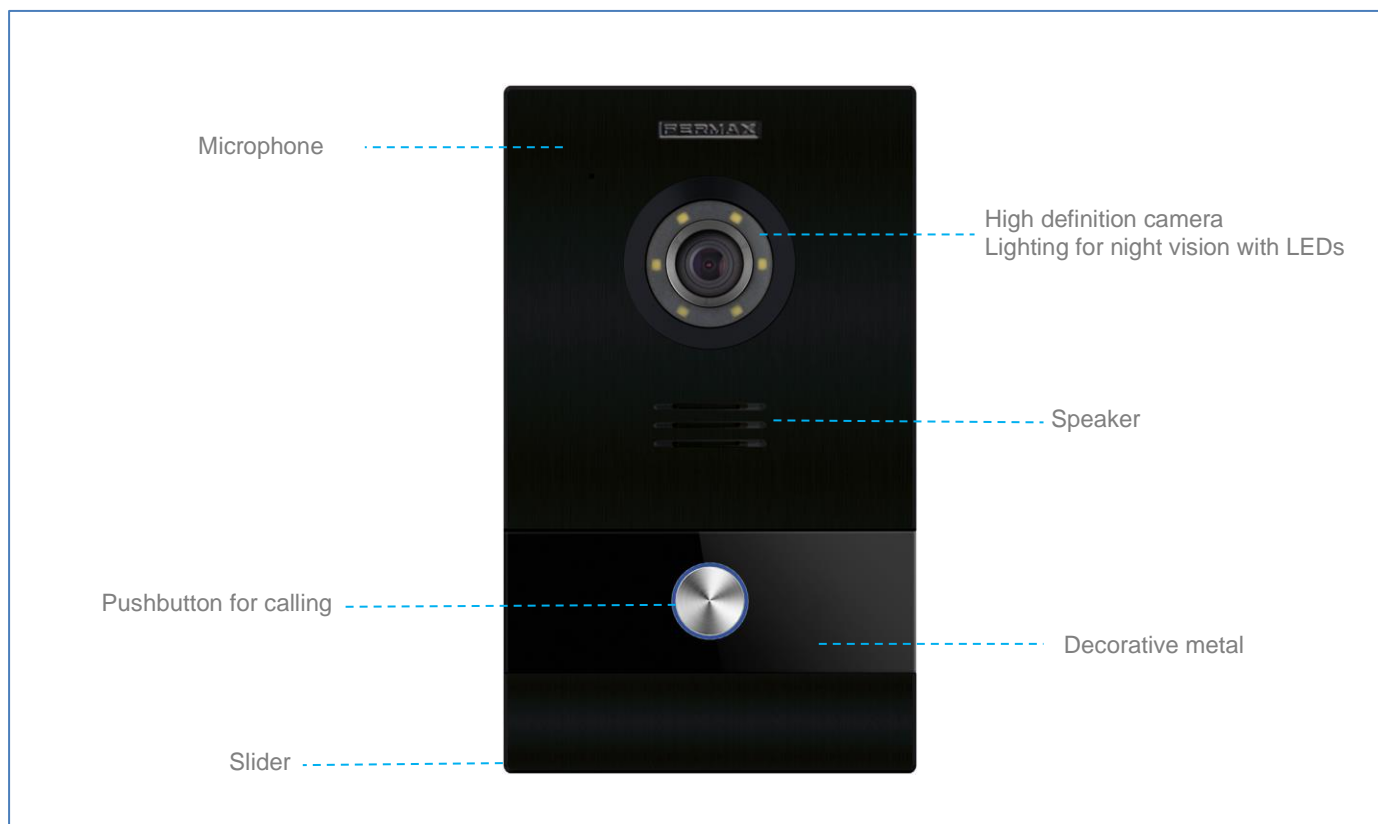

1/W VIDEO MILO PANEL BLACK POE is presented in one version without proximity reader. For integrated prox. reader, refer to MILO 1W panel grey color ref.9534. Not compatible with Lift Control function

FEATURES

- Aluminum Profile
- High Resistance Tempered Glass
- High Definition Color Camera
- Low Power Consumption
- Wide Range Working Environment
- SIP compatible
- Linux Modular Structure
- Available In 11 languages
- Tags for identification in called devices

FUNCTIONS

CALL TENANT

Visitors can call the desired tenant from 1L panel. Alternatively, it can be configured to call one guard unit acting as an emergency call panel.

REFERENCES

- Ref. 953303 1/W VIDEO MILO PANEL BLACK POE
- Ref. 9543 MILO PANEL FLUSH BOX – S
- Ref. 9518 MILO SURFACE BOX-S (stainless steel grey color)

TECHNICAL SPECIFICATIONS

System:

- CPU: ARM Cortex-A7 1.2GHz
- FLASH: 128M
- SDRAM: 64M

Audio Features:

- G.711 protocol
- Audio level 17.7 dB

Camera:

- 1/3" CMOS Color
- 120° visual angle. 52° (V), 100° (H)
- 1 Mega Pixels
- Minimum illumination 0.5 LUX
- AWB

LED:

- White LED
- LM 60 mA Min. 24, Typ. 26
- View Angle 2θ1/2: 120

Power Consumption:

- On standby: 125mA
- Working: 250mA

Working voltage:

- 12 VDC or PoE


Connectivity:

- Ethernet RJ-45 Connector PoE
- Exit button and door sensor connection
- NO, C, NC: Door lock release connection
- Built in web server for configuration and remote management


Working Environment:

- Temperature: -25 °C – 70 °C
- Humidity: 10 – 90% (non-condensing)
- IP 54

DIMENSIONS (mm)

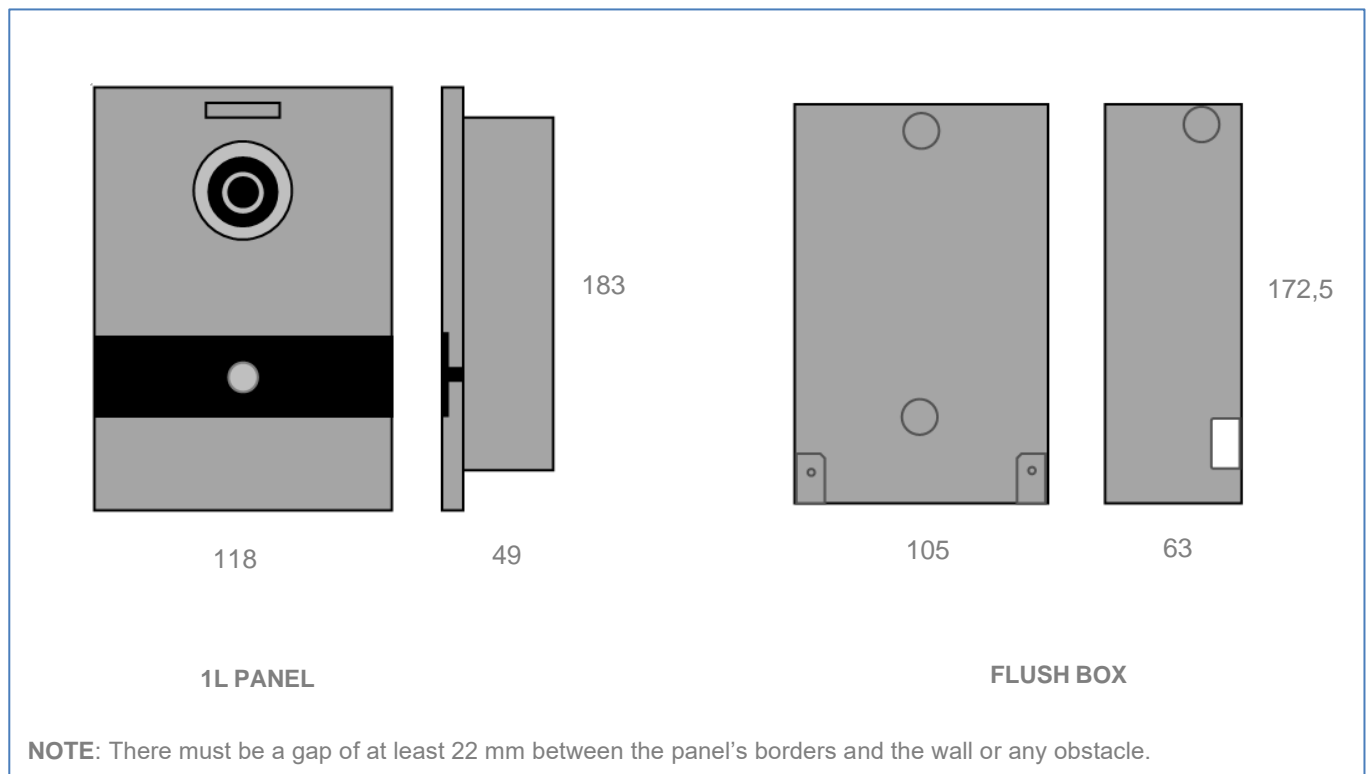

CONNECTIONS

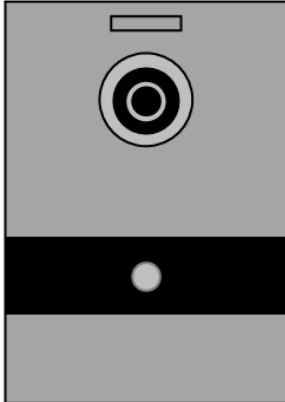

RJ-45 10/100 Base -T Ethernet PoE

+, - : 12 Vdc power supply input

BS, -, NA, SP: Exit button and door sensor connection

NO, C, NC: Door lock release connection

485+, 485-: RS485 serial port for spare