


DUOX PLUS VEO-XS 4.3" MONITOR

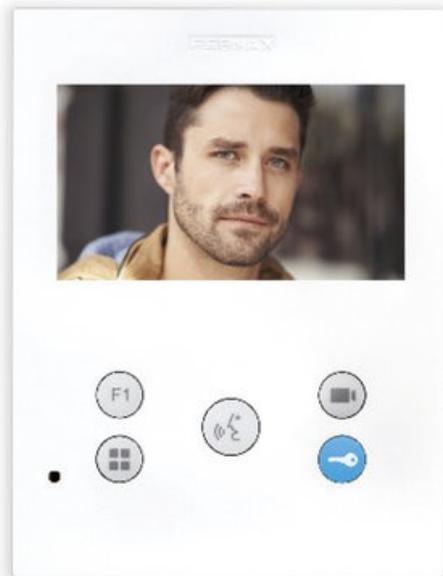

Referencja: 9448

Hands-free DUOX VEO-XS monitor is characterised by its small size and extra-flat thickness. Thanks to its OSD menu and the layout of the buttons, interaction with the user is simple and intuitive. Made...

OPIS

Hands-free DUOX VEO-XS monitor is characterised by its small size and extra-flat thickness. Thanks to its OSD menu and the layout of the buttons, interaction with the user is simple and intuitive. Made of high impact ABS plastic. Texturised finish for easy cleaning and ultraviolet protection. VEO-XS incorporates a 4,3" (16:9) panoramic color TFT screen. Its balanced design of pure lines is distinguishing, modern and minimal.

SPECYFIKACJE TECHNICZNE

GENERAL CHARACTERISTICS

Technology: DUOX PLUS (non-polarised 2 wire full digital system)
Audio/Video system: Audio/Video Color
Set-up (Installation): Surface mounted (order connector ref. 9447 separately)
Desktop support: Yes (ref. 9420)
Hands-free communication: Yes
Press-to-talk communication configurable: Yes
Induction loop included: No (order monitor ref. 9458 with induction loop)
Screen dimensions: 4,3" (Panoramic 16:9)
Screen resolution (H x V): 480 x 272
Color of the product: Matt white
Number of pushbuttons: 5
Kind of pushbuttons: Mechanical (silicone)
Number of leds for lighted indications: 3 (red, blue, green with different states)

PROGRAMMING OF THE TERMINAL ADDRESS

From the terminal: From the OSD menu
From the outdoor panel or guard unit: Yes
From the outdoor panel throughout the apartment door bell: Yes

FEATURES

Automatic picture capture when the visitor calls (PHOTOCALLER): Yes (1 photo/call, until 150 photos, 368 x 288 pixels). This

feature can be enabled by the user. Disabled by default.

Guard unit call: Yes (by means of the door release button)

Auto-on: Yes (with 3 outdoor panels/cameras)

OSD menu: Yes

Additional function F1: Yes (Button F1 sends a negative and/or command)

Additional function F2: Yes (it only sends command, no negative)

Apartment door bell differentiated from the outdoor panel: Yes

Connection for additional devices (call extension, light/buzzer activator, etc.): Yes (ref. 2040, ref. 2438, ref. 3267)

Additional terminals on the same address: Yes, max. 2 additional terminals (additional power supply can be required)

Doormatic (automatic door release for offices, etc.): Yes (configurable until 12h). Green Led ON.

ADJUSTMENTS

Date and time: Yes

Ring tones selection: Yes (5). Configurable for Block Panel 0, Block Panel 1, General Entrance Panel 0 and Concierge unit.

Call volume control: Yes (10 levels by OSD menu)

Do-not-disturb mode: Yes (by OSD menu) + Red led indication

Audio volume control: Yes (10 levels by OSD menu)

Brightness, color and contrast control: Yes (by OSD menu)

TECHNICAL FEATURES

Product dimensions (width x height x depth) mm: 125 x 165 x 21

Time to answer or open the door since the call is done: 30 s.

Conversation time: 90 s.

Conversation privacy: Yes

Voltage: 18-24 Vdc

Maximum consumption: 6.5 W (14,4W in ref. 9458 if the induction loop is on)

Standby consumption: 0.8 W

Working temperature (°C, °F), Humidity: [-5°C, +40°C][23°F, 104°F], [0%, 90%]

Line adaptor included in the terminal: Yes (A, C, default position OFF)

Connections: Bin, Bin, Bout, Bout, -, A+, F1, T

Waga: 0,2768 kg

Rozmiary opakowanego produktu: 17x12,8x4 cm

EAN 13: 8424299094489