

12v. 2,3Ah. DSK Bat. Plomo Acido

EAN 8420738103231

Ref. 10323

Descripción:


BATERIA PLOMO DSK 12V 2.3Ah

Especificaciones:



MODELO BATERIA	10323 (12v. 2.3Ah. DSK Bat. Plomo Acid)			
VIDA UTIL	3~5 años			
CAPACIDAD (25°C)	20HR(0.115A,10.5V)	10HR(0.22A,10.5V)	5HR(0.41A,10.5V)	1HR(1.38A,10.5V)
	2.30AH	2.2AH	2.05AH	1.38AH
DIMENSIONES	Longitud	Ancho	Altura	Altura Total
	179mm (7.05inch)	35mm (1.38inch)	61mm (2.4inch)	66mm (2.6inch)
PESO APROX	0.92 Kg (2.03 lbs) ±5%			
RESISTENCIA INTERNA	Carga completa at 25°C:≤95mΩ			
DESCARGA	3% de reducción al mes (25°C)			
CAPACIDAD AFECTADA POR TEMP.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
VOLTAJE DE CARGA (25oC)	Ciclo normal		Ciclo en modo flotación	
	14.4-15.0V(-30mV/°C), max. Current: 0.69 ^a		13.6-13.8V (-20mV/) °C	



35.0±1.0 [1.38±0.04]

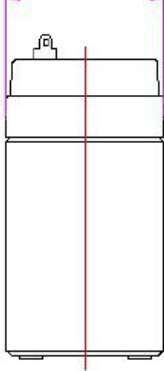

179.0±1.0 [7.05±0.04]

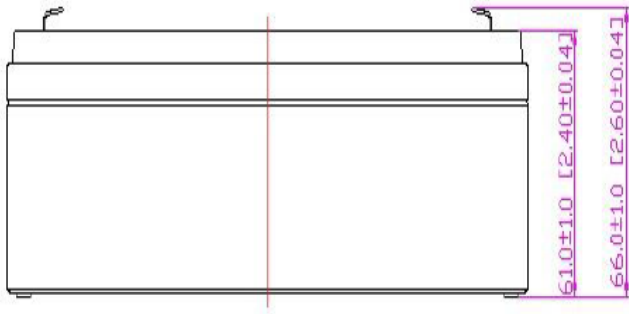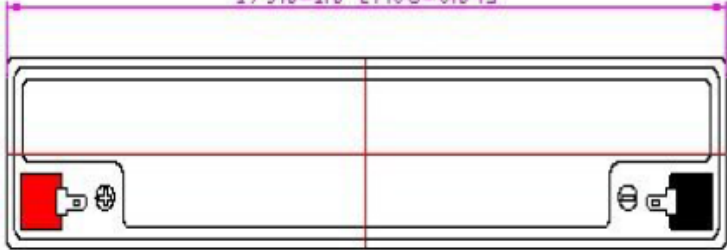


12v. 2,3Ah. DSK Bat. Plomo Acido

DSK


EAN 8420738103231

Ref. 10323


Terminal Voltage (V) and Discharge Time




Capacity Retention Characteristic

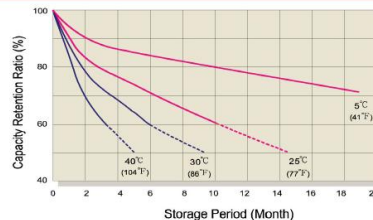


Tickle(or Float) Service Life




Battery Voltage and Charge Time for Standby Use

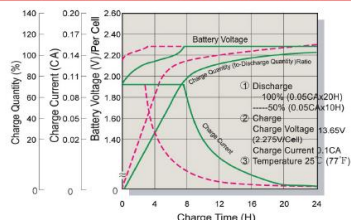

Battery Voltage and Charge Time for Cycle Use



Cycle Service Life

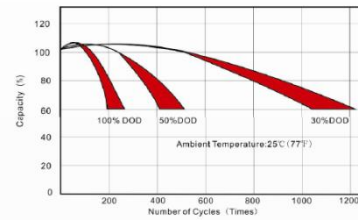


Constant Current Discharge(CC,Unit:A) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	6.34	4.69	3.40	2.29	1.33	0.76	0.58	0.464	0.399	0.325	0.213	0.111
1.80V/Cell	6.46	4.77	3.46	2.33	1.35	0.78	0.59	0.473	0.406	0.331	0.217	0.113
1.75V/Cell	6.59	4.86	3.53	2.37	1.38	0.79	0.60	0.482	0.414	0.337	0.221	0.115
1.70V/Cell	7.18	5.16	3.74	2.47	1.40	0.80	0.61	0.491	0.421	0.343	0.225	0.117
1.67V/Cell	7.90	5.59	4.06	2.61	1.42	0.81	0.62	0.496	0.426	0.347	0.228	0.118
1.60V/Cell	8.56	5.89	4.27	2.72	1.43	0.82	0.63	0.501	0.430	0.351	0.230	0.120

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	12.37	9.14	6.63	4.46	2.59	1.48	1.13	0.91	0.78	0.63	0.42	0.22
1.80V/Cell	12.61	9.31	6.75	4.54	2.64	1.51	1.16	0.92	0.79	0.65	0.42	0.22
1.75V/Cell	12.84	9.49	6.88	4.63	2.69	1.54	1.18	0.94	0.81	0.66	0.43	0.22
1.70V/Cell	14.00	10.05	7.29	4.81	2.73	1.57	1.20	0.96	0.82	0.67	0.44	0.23
1.67V/Cell	15.41	10.91	7.91	5.08	2.76	1.58	1.21	0.97	0.83	0.68	0.44	0.23
1.60V/Cell	16.70	11.48	8.32	5.30	2.79	1.60	1.22	0.98	0.84	0.68	0.45	0.23

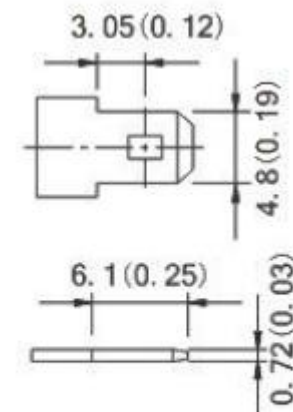

F0 Terminal